




Double-row ball slewing bearing Internal geared

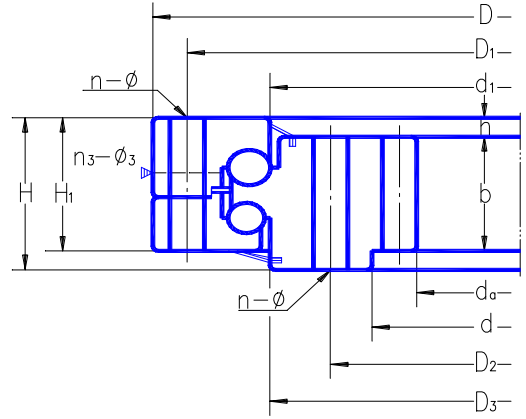

内齿式 Internal geared	外形尺寸 Boundary dimensions			安装孔尺寸 Bolt hole diameter				结构尺寸 Structure dimensions					齿轮参数 Gear parameters					Basic load rating Coa 10 ⁴ N	质量 Mass kg	
	D	d	H	D1	D2	n	φ	D3	d1	H1	h	n3	φ3	m	da	Z	b			x
mm			mm				mm													
023-25-500-**-024-25-500-**-023-25-560-**-024-25-560-**-023-25-630-**-024-25-630-**-023-25-710-**-024-25-710-**-	616	384	106	580	420	20	18	523	518	96	26	4	M10×1	5	355	72	60	0.5	121	100
023-30-800-**-024-30-800-**-023-30-900-**-024-30-900-**-023-30-1000-**-024-30-1000-**-023-30-1120-**-024-30-1120-**-	942	658	124	898	702	30	22	829	823	114	29	6	M10×1	8	616	78	80	0.5	230	200
023-40-1250-**-024-40-1250-**-023-40-1400-**-024-40-1400-**-023-40-1600-**-024-40-1600-**-023-40-1800-**-024-40-1800-**-	1426	1074	160	1374	1126	40	26	1286	1282	150	39	6	M10×1	12	1008	85	90	0.5	482	580
023-50-2000-**-024-50-2000-**-023-50-2240-**-024-50-2240-**-023-50-2500-**-024-50-2500-**-023-50-2800-**-024-50-2800-**-	2215	1785	190	2149	1851	48	33	2038	2032	178	47	8	M10×1	16	1696	107	120	0.5	987	1150
023-60-3150-**-024-60-3150-**-023-60-3550-**-024-60-3550-**-023-60-4000-**-024-60-4000-**-023-60-4500-**-024-60-4500-**-	3428	2872	226	3338	2962	56	45	3198	3192	214	56	8	M10×1	20	2760	139	150	0.5	1870	3300